




	<i>Poly-Triplex</i>	<i>Raven Lining Systems</i>	<i>Saureisen</i>	<i>Sealing Systems, Inc.</i>	<i>Remote Orbital Installations</i>	<i>The Strong Company</i>
	PTLS-6800	Raven 404	Saureisen Sewerguard	ElastoGard DLX	Flex-Seal Utility Sealant	Strong-Seal MS-2C
Flexural Strength (ASTM-D 790)	44,535	6,000	4,600	No Data	No Data	700
Tensile Strength (ASTM-D 638)	28,400	4,200	2,500	7,100	1,150	600
Warranty	10 years materials and labor	1 year manufacturer's	Replacement of defective product	None	Replacement of defective product	Limited
Life Expectancy	100 year useful life certification	3-5 year life cycle	3-5 years	3-5 years	3-5 years	5+ years

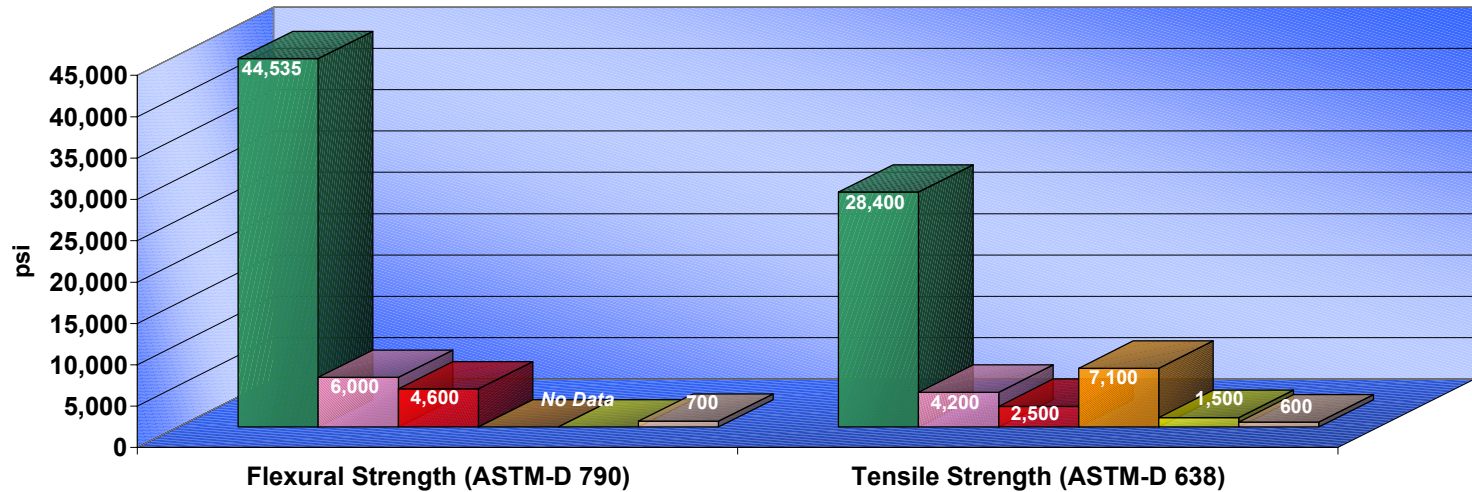

The Poly-Triplex Difference

A Comparison of infrastructure rehabilitation strength

www.polytriplexoftx.com